


STANDARD END CAP (All Versions)
 S-29 56.80 OR SI-27 53.78 CHAMBERS FOR EXTREME LOADING CONDITIONS THE RSD LINE OF CHAMBERS IS RECOMMENDED
 3/4" - 2 INCH WASHED, CRUSHED, ANGULAR STONE
 AASHTO M288 CLASS 2 NON-WOVEN GEOTEXTILE OR EQUAL

GRANULAR WELL GRADED SOIL/AGGREGATE MIXTURES, <35% FINES. COMPACT IN 6 IN LIFTS TO 95% PROCTOR DENSITY. SEE THE TABLE OF ACCEPTABLE FILL MATERIALS

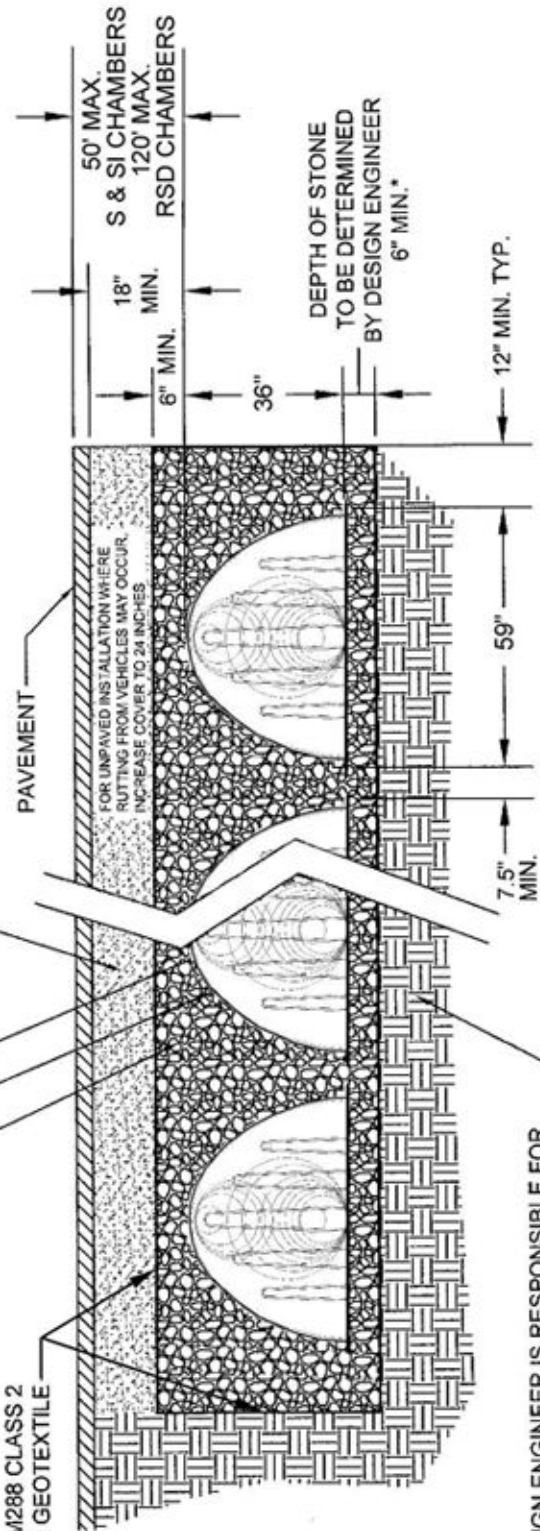

DESIGN ENGINEER IS RESPONSIBLE FOR ENSURING SUITABILITY OF SUBGRADE SOILS*

TYPICAL CROSS SECTION DETAIL FOR S, SI & RSD LINE OF CHAMBERS
 * NOT TO SCALE*

<p>TRITON STORMWATER SOLUTIONS</p>		<p>TITLE: SINGLE LAYER SYSTEM</p>	
<p>SIZE A</p>	<p>DWG. NO.</p>	<p>REV</p>	<p>SHEET 1 OF 1</p>
<p>SCALE:</p>	<p>WEIGHT:</p>	<p>1</p>	<p>2</p>
<p>3</p>	<p>4</p>	<p>5</p>	<p>1</p>
<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±</p>			
<p>INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL: FINISH: USED ON: APPLICATION:</p>			
<p>DO NOT SCALE DRAWING</p>			
<p>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRITON STORMWATER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TRITON STORMWATER SOLUTIONS IS PROHIBITED.</p>			